


- > MARINE ARMATUR TIL SKIBE OG HAVNE
- > VIBRATIONSTESTET JF. IACSE10
- > AISI316 BESLAG
- > GENNEMFORTRÅDET 5X2,5MM²
- > 120° LYSSPREDNING
- > PHILIPS XITANIUM IXT DRIVER MED VIBRATIONSTEST
- > PHILIPS XITANIUM IXT DRIVER 100.000 TIMER+
- > KAN LEVERES MED MAGNETMONTERING
- > 4kV TRANSIENTBESKYTTELSE I DRIVER
- > FLEXIBELT BESLAG FOR MONTERING



## SPECIFIKATIONER

Varenummer	571001010100	571001010200
Model	60cm	120cm
Spænding	AC 220V-240V	
Frekvens	50Hz-60Hz	
Power factor	> 0.92	
Effekt	23W	40W
Vægt	2,14 kg	3,28 kg
Farvegengivelsesindeks	Ra>80	
Front	UV bestandig polycarbonat	
Farvetemperatur	4000 K	
Lumen	135Lm/W	
Lysspredning	120°	
Gennemsnitlig levetid ved 25 °C	L80B10 > 50.000 timer	
LED	Lumileds LED	
IK	IK10	
Arbejdstemperatur	-40°C / +50°C	
Kapslingsklasse	IP 67	
Energiklasse	A+	

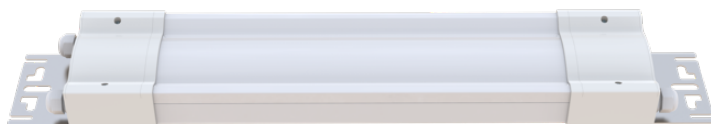