


primus®

GET AHEAD IN LAUNDRY

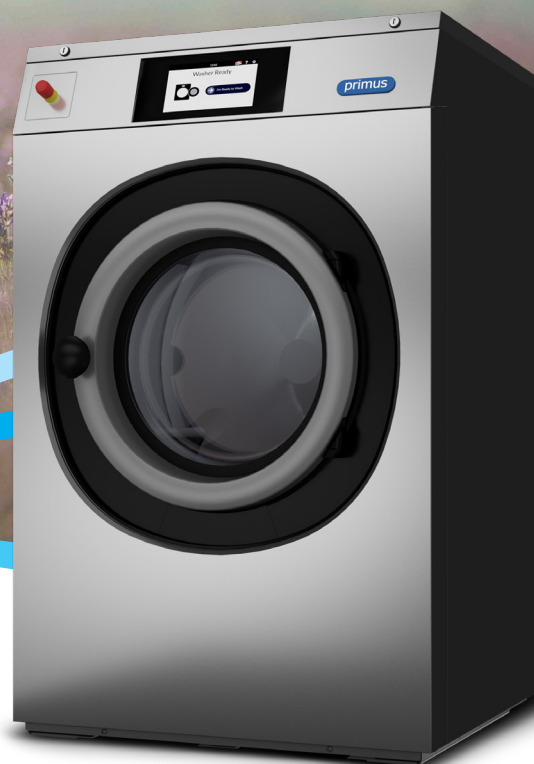

RX180 | RX240 | RX280

HARDMOUNT WASHER-EXTRACTORS



CASCADE DRUM TECHNOLOGY
Extra mechanical action thanks to its cascading shape of the surface



220G EXTRACTION SPEED
For lower rest humidity



HIGH CAPACITY WATER INLETS
For shorter wash cycles



TOUCH CONTROL AVAILABLE
Multilingual user-friendly 7" touch control



EXTRA LARGE DOOR OPENING
For easy loading and unloading



IMPROVED DURABILITY
for your peace of mind with a 3-year warranty

FEATURES & BENEFITS

Features

- Rigid mounted, normal spin, up to 220G factor (touch control only)
- Stainless steel drum and tub
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Large drain valve (Ø 76 mm)

Options

- Coin operated
- Stainless steel front and side panels
- Liquid soap connection and pumps
- Steam heating version
- ECO version: Lower kW rating on request
- 3rd water inlet

Control

- XControl FLEX+ – fully programmable control and customizable cycles 7" touch screen.
 - User-friendly screen with operating instructions built in as part of the control
 - Complete control content available in 36 languages
- XControl – fully programmable control with 15 pre-set program
- XTronic – Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)


SPECIFICATIONS

TYPE		RX180	RX240	RX280
INNERDRUM				
Capacity 1:09	kg (lb)	20(44)	27(60)	31(68)
Capacity 1:10	kg (lb)	18(40)	24(53)	28(62)
Volume	litres	180	240	280
Diameter	mm	750	750	750
DRUM SPEED				
Wash	rpm	42	42	42
Extraction	rpm	690 (725)*	690 (725)*	690
G-Factor		200 (220)*	200 (220)*	200
HEATING				
Electric heating	kW	12 / 18	18	21,9
Steam heating	bar	1-8	1-8	1-8
Hot water	°C	85	85	85
Water inlet connection	BSP	3/4"	3/4"	3/4"
Water pressure	kPa	100-800	100-800	100-800
Rec. water pressure	kPa	300-500	300-500	300-500
Water inlet flow capacity (400 kPa)	l/min	133	133	133
Steam valve connection	BSP	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800
Drain valve	outer Ø mm	76	76	76
Flow amount with drain valve	l/min	210	210	210
Sound pressure level	dB (A)	< 65	< 65	< 65
Electrical Connection			200-240 V 50/60 Hz 1/3 Ph 380-415 V + N 50/60 Hz 3Ph 380-415 V 50/60 Hz 3Ph 440-480 V 50/60 Hz 3P	
MOTOR				
Drive	kW	1,1	1,5	1,5
DIMENSIONS				
Size H×W×D	mm	1410×890×915	1410×890×1060	1410×890×1135
Net weight	kg	315	330	355
TRANSPORT DATA				
Packed H×W×D	mm	1550×925×970	1550×925×1130	1550×925×1190
Gross weight	kg	335	355	385
* 220 G-factor execution with Touch control only				

* 220 G-factor execution with Touch control only

DIMENSIONS

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	S
RX180	890	915	1410	816	465	280	130	1212	1302	113	218	303	530	1270	1304	528	54	120
RX240	890	1060	1410	961	465	280	130	1212	1302	113	218	303	530	1270	1304	528	54	120
RX280	890	1135	1410	1036	465	280	130	1212	1302	113	218	303	530	1270	1304	528	54	120
	width	depth	height															

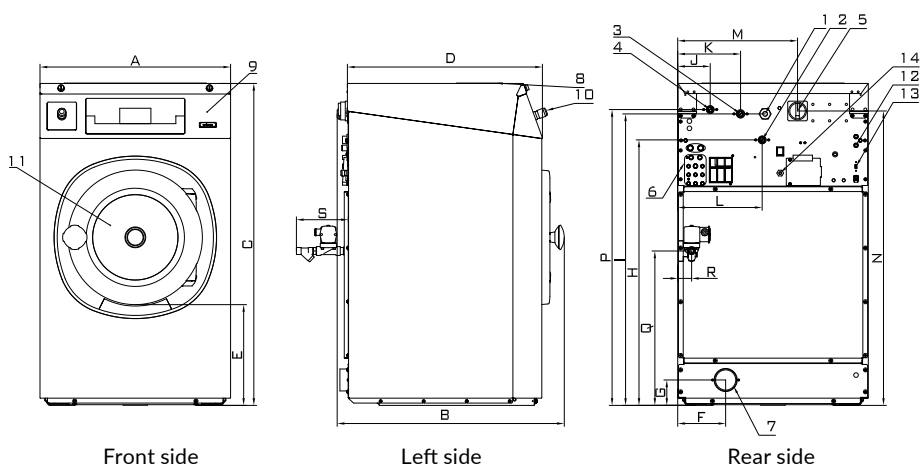

- | | | |
|--------------------------|---------------------------|--|
| 1. Electrical connection | 6. Liquid soap connection | 11. Door opening (Ø 460mm) |
| 2. Hot water | 7. Drain | 12. Fuses |
| 3. Cold water hard | 8. Soap dispenser | 13. USB port |
| 4. Cold water soft | 9. Control panel | 14. Electrical connection to liquid soap pumps |
| 5. Main switch | 10. Button Central Stop | |